



Multi-Cartridge Band-Clamp Liquid Vessels GTCHB Series

Vessel Data Sheet


GTCHB Series Multi-Cartridge Vessels are designed for industrial and commercial applications. Vessels are constructed of 304 or 316 stainless steel and accept DOE, 222/FLAT, and 222/FIN end cartridges in 10, 20, 30 and 40 inch lengths.

Features

- Heavy-duty welded mounting/support legs
- Easy-access heavy-duty band-clamp closure
- Single o-ring design (Buna-N standard)
- Universal seal cups and compression plates allow vessels to accept DOE, 222/FLAT, or 222/FIN cartridges
- Ply-coat finish (exterior only)
- 316 stainless steel cap/spring assemblies and v-post
- 150 PSI pressure rating

Options

- Sanitary porting
- Alternate seal materials

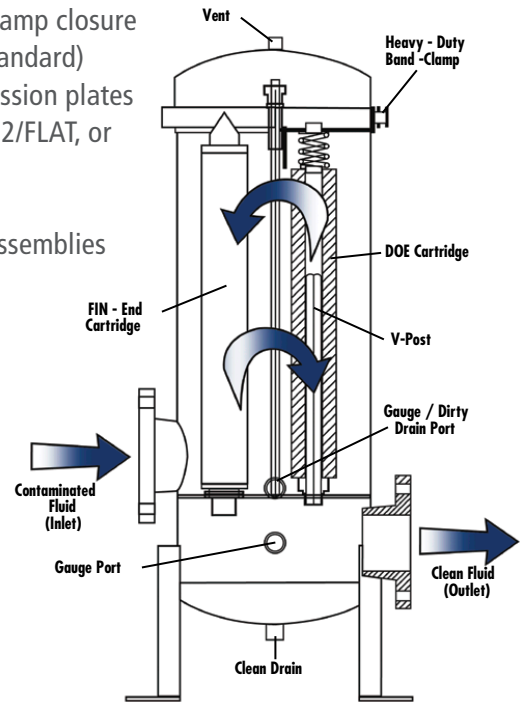

Ordering Information

GTCHB	# of Cartridges	Length	Inlet/Outlet Size	Inlet/Outlet	Outlet	Material	Pressure Rating	Surface Finish
	4 = 4	1 = 10"	2 = 2"	N = FNPT	2 = Opposite Outlet	4 = 304 SS	15 = 150 PSI @ 250°F	PC = Poly-Coat
	5 = 5	2 = 20"	3 = 3"	F = RF Flange		6 = 316 SS		
	7 = 7	3 = 30"	4 = 4"	T = TC Sanitary				
	12 = 12	4 = 40"						
	22 = 22							

www.culligan.com

All trademarks used herein are registered trademarks of Culligan International Company. Products manufactured or marketed by Culligan and its affiliates are protected by patents issued or pending in the United States and other countries. Culligan reserves the right to change the specifications referred to in this literature at any time, without prior notice.
©2017 Culligan International Company
PN - 47205